

# avenlur

## Juniper by Avenlur



### Need Help?

CALL US AT 888.697.3931 / M-F 9AM - 5PM PT (12PM - -8PM ET)

OR EMAIL US AT [INFO@AVENLUR.COM](mailto:INFO@AVENLUR.COM)

V5

## **WARNING**

Adult assembly required.


## **WARNING**

Maximum user weight: 55lbs (25kg) per child.

## **WARNING**

### **CHOKING HAZARD:**

Adult assembly required. Keep small assembly parts out of reach of children.

 Use under adult supervision.

**OBSERVE ALL STATEMENTS AND WARNINGS TO REDUCE THE LIKELIHOOD OF SERIOUS OR FATAL INJURY. SAVE THIS SHEET FOR FUTURE REFERENCE.**

## **OPERATION INSTRUCTIONS**

1. An adult should always supervise use of this product by children of all ages.
2. Instruct children not to attach items to the playground equipment that are not specifically designed for use with the equipment (examples: ropes, clothesline, pet leashes, cables and chain, etc) as they may cause a strangulation hazard or any other hazard.
3. Never allow children to use the equipment in a manner other than intended.

## **MAINTENANCE INSTRUCTIONS**

1. Inspect the product periodically for loose or damaged components. **Tighten bolts if need.**
2. Check all connections and bolts for tightness at least twice monthly during the usage.
3. Check all coverings and bolts for sharp edges.

## **INSTALLATION INSTRUCTIONS**

Please have an electrical drill available for assembly if possible.

If you have difficulty in installation, please contact us for help and get installation video for reference.

### **Please Ensure:**


1. You are assembling with at least two people to ensure that all sides and parts are leveled.
2. You don't screw the parts in too hard or it will splinter the wood.
3. You follow the directions carefully.

### **CONTACT US BEFORE ASSEMBLY IF:**


- You need assistance with assembly
- You need a replacement part due to a missing part or defective part

Call us at 888-697-3931 M-F 9AM-5PM PT


or email us at [info@avenlur.com](mailto:info@avenlur.com)




①x1




②x1




③x1




④x1




⑤x1




⑥x1




⑦x2 45.27in



⑬x1 45.27in

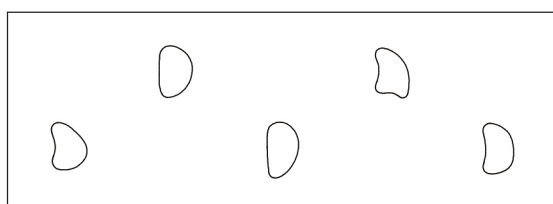


⑧x1 43.6in



⑭x1 45.27in




⑮x2 44.76in




⑨x1 45.27in



⑯x1 18.58in




⑩x1 45.27in




⑰x7 18.58in




⑱x1 19.8in




⑪x1 45.27in



⑲x1




⑳x1



⑫x1 45.27in




㉑x2 42.5in




M6.3x40

Ⓐx30




M4x20

Ⓑx2




M6x45 M6x20

Ⓒx6




M6x40 M6x20

Ⓓx4




M6x40 M6x20

Ⓔx6




M6x30 M6x20

Ⓕx2



4mm




Ⓖx2



M6x50 M6x13

Ⓗx2

Note: Pay attention to all the black bubbled section markers. The manual may refer back to those later.

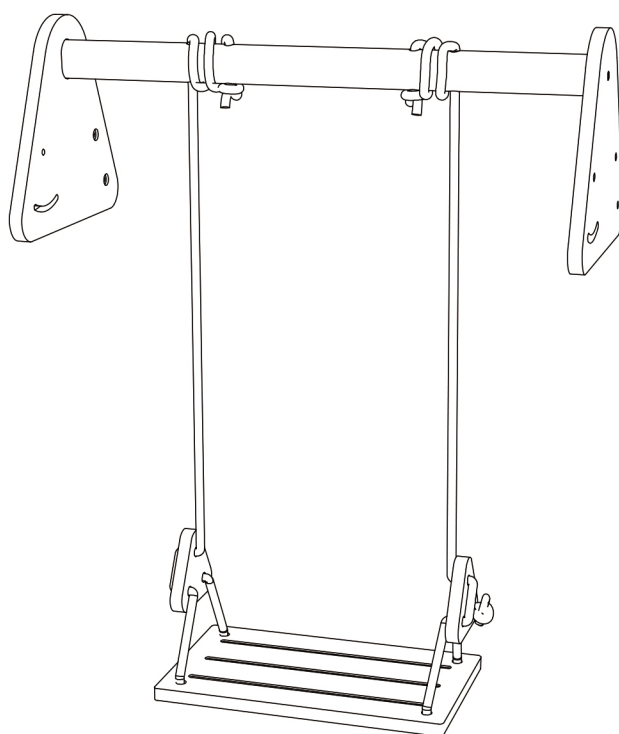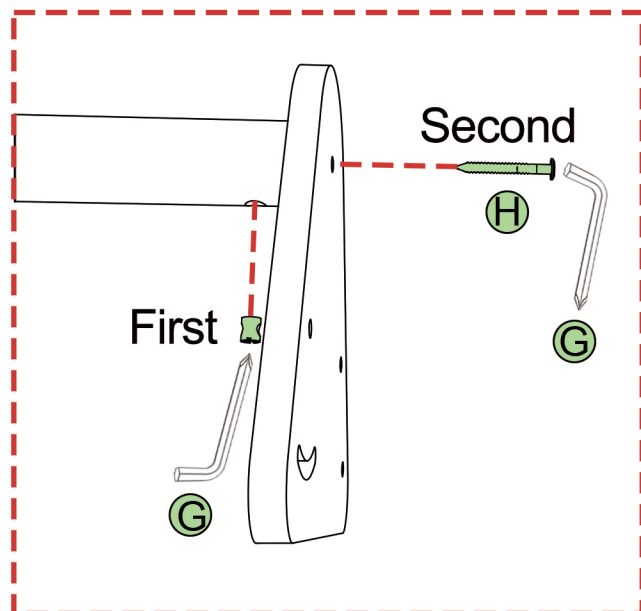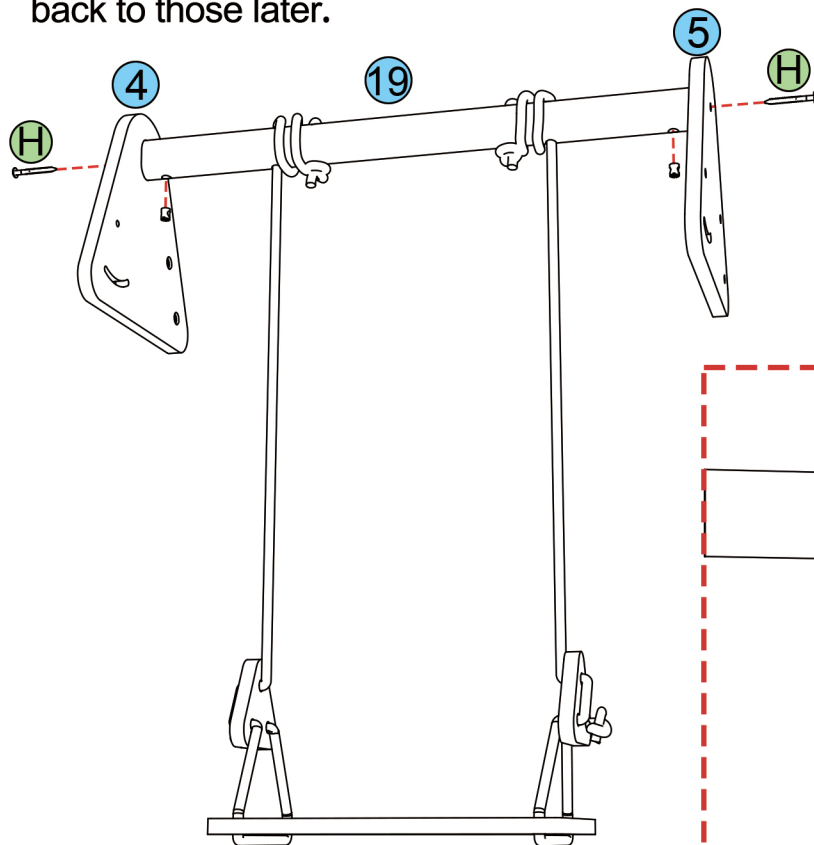


First: Put the connector in the hole with the crosshairs facing out. Use the Philips screwdriver side of one tool part **G** to hold the connector stationary for the threading of the screw go in.

Second: Use the hex side of the other tool part **G** to thread the screw into the hole of the connector.


<b>H</b>	M6x50 M6x13	2
<b>G</b>	4mm	2







02-1

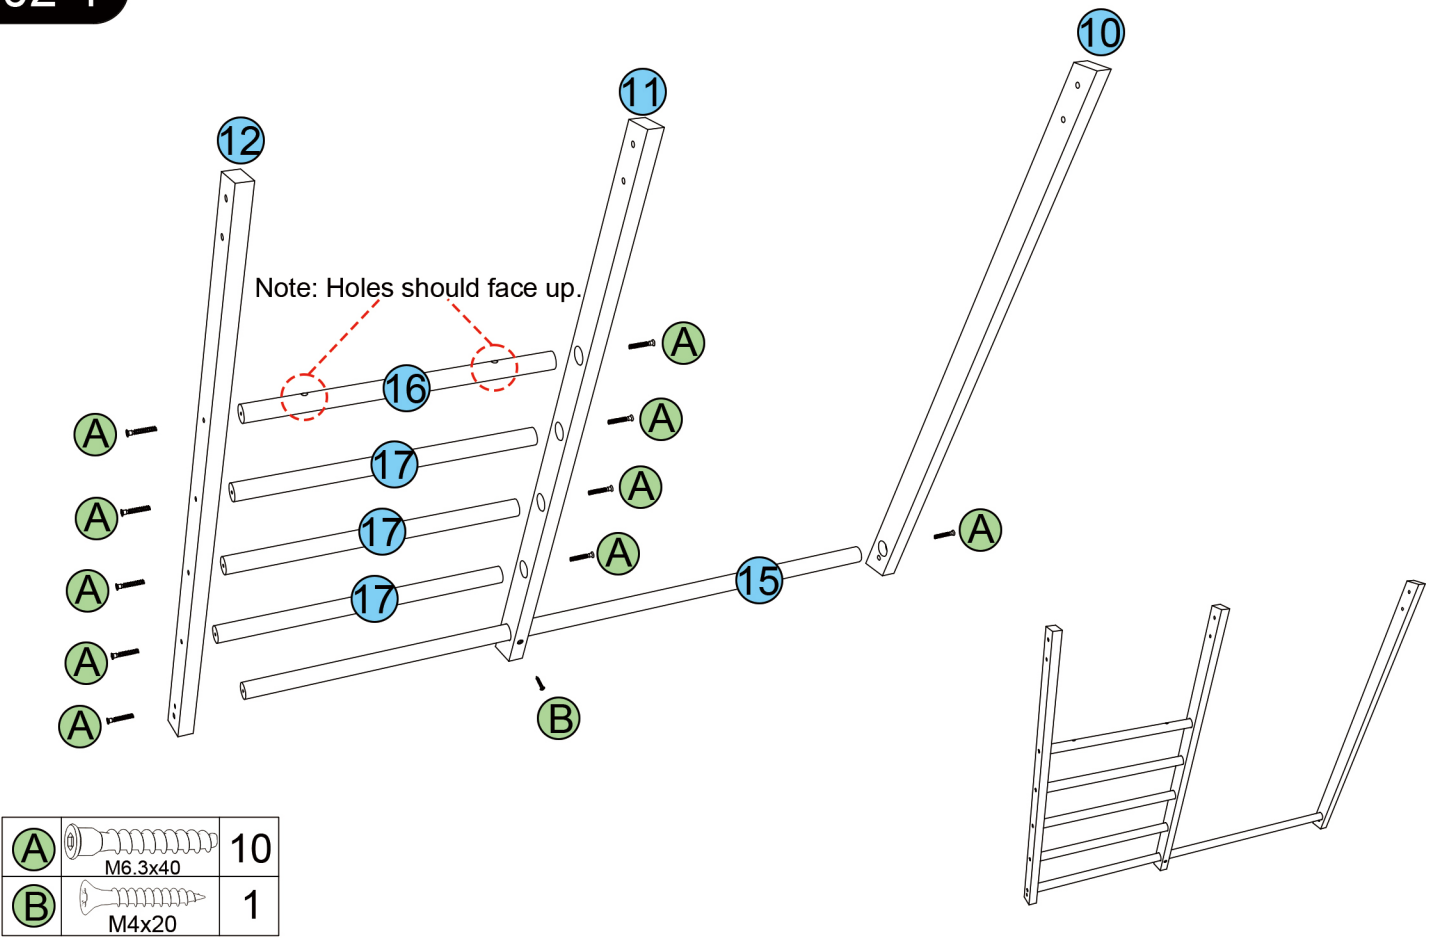

03-1

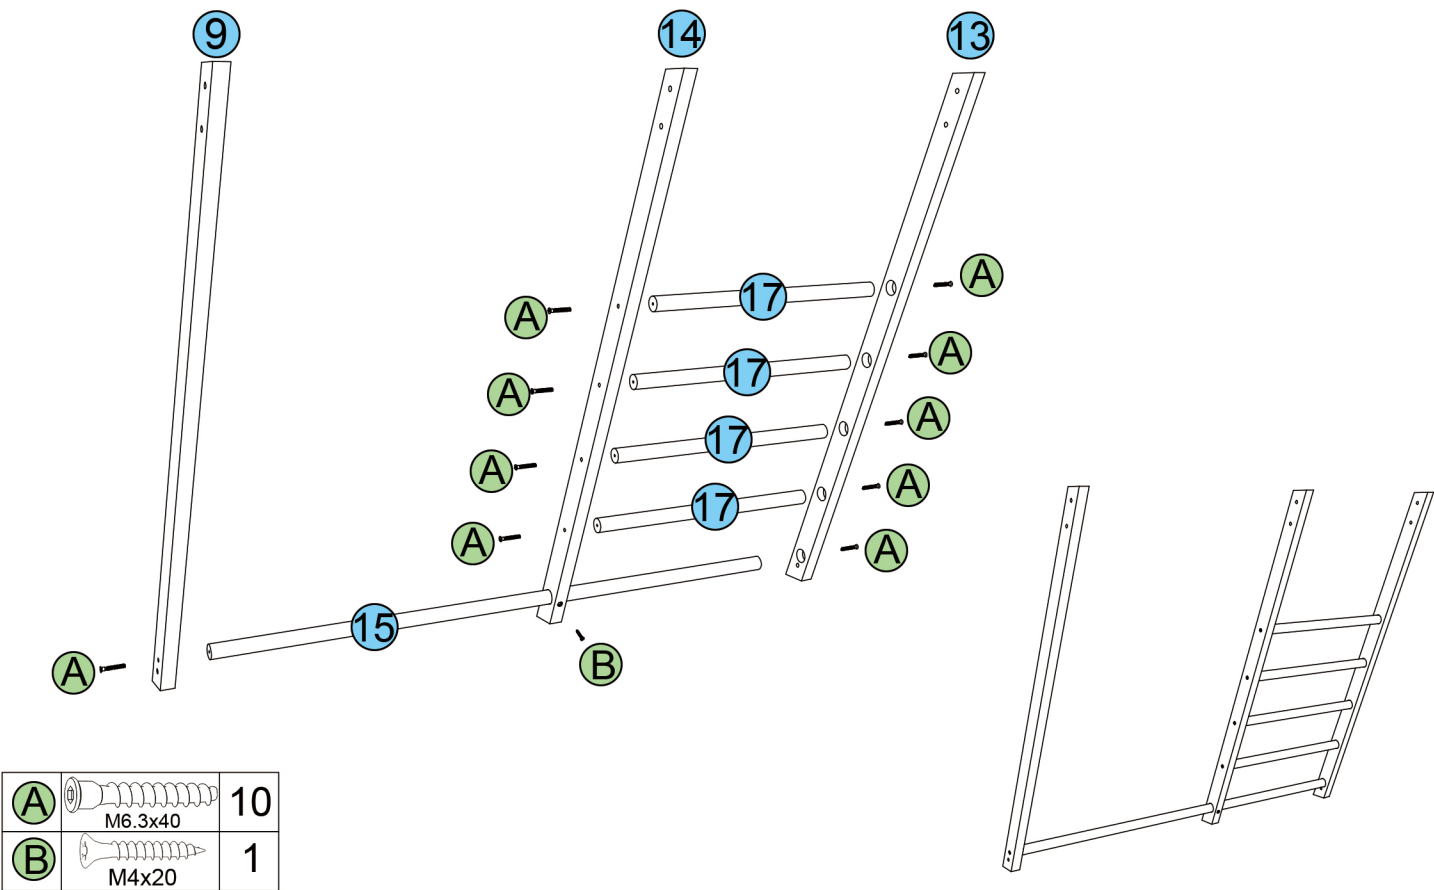

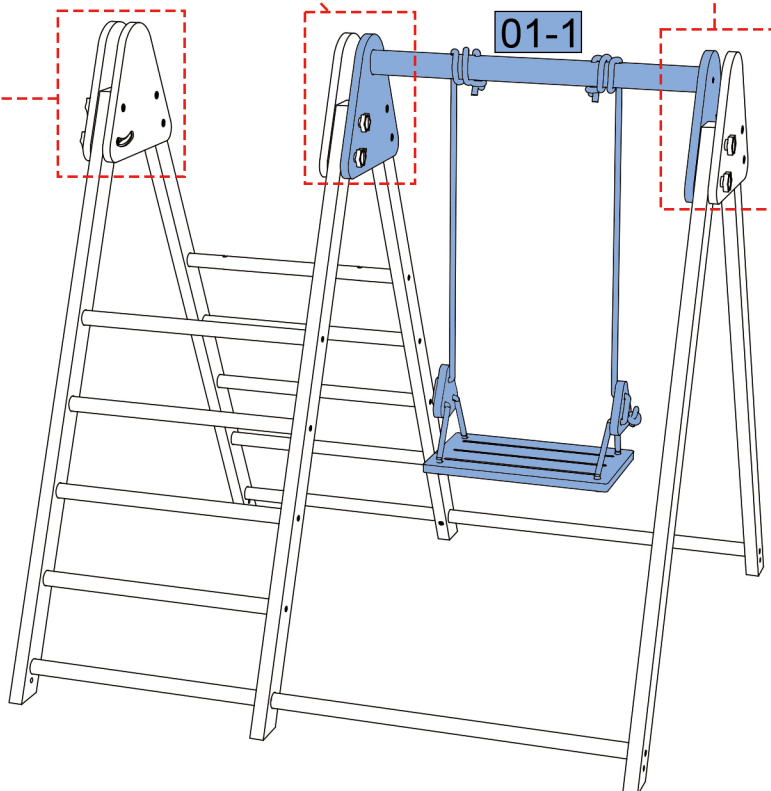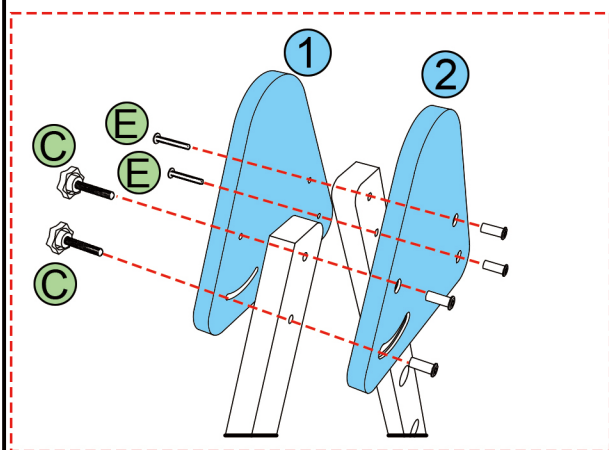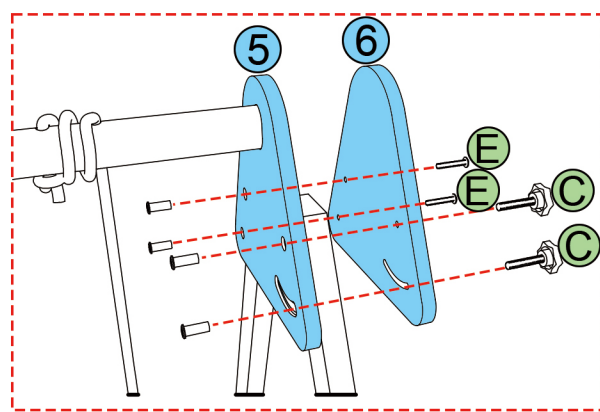
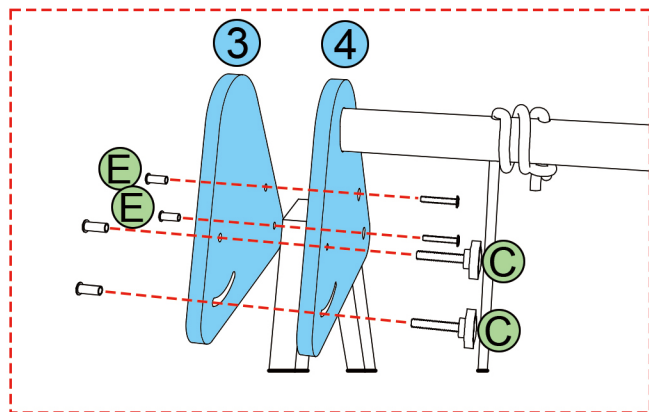




Note:

1. Attach ① and ② with Screws ③ (2pcs) and Screws ④ (2pcs)
2. Attach ③ and 01-1 with Screws ③ (2pcs) and Screws ④ (2pcs)
3. Attach ⑥ with Screws ③ (2pcs) and Screws ④ (2pcs)



③	M6x45 M6x20	6
④	M6x40 M6x20	6
⑤	4mm	2



05-1

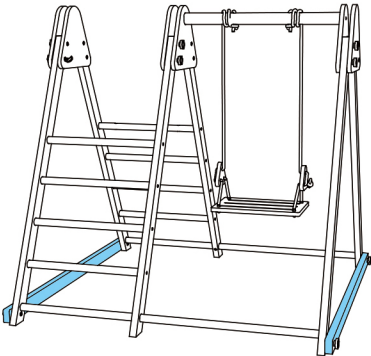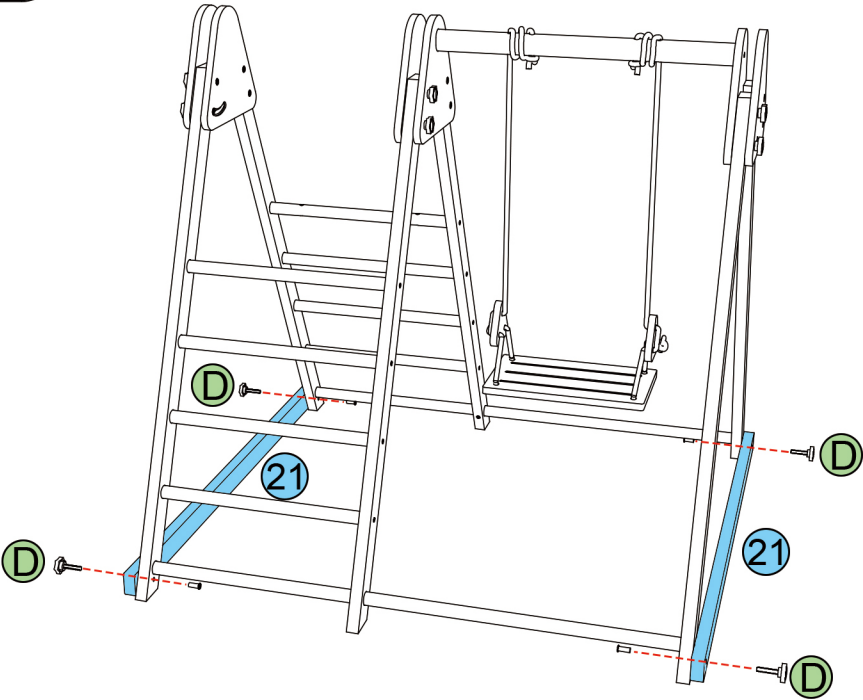



<b>(D)</b>	 M6x40 M6x20	4
<b>(G)</b>	 4mm	1

06-1

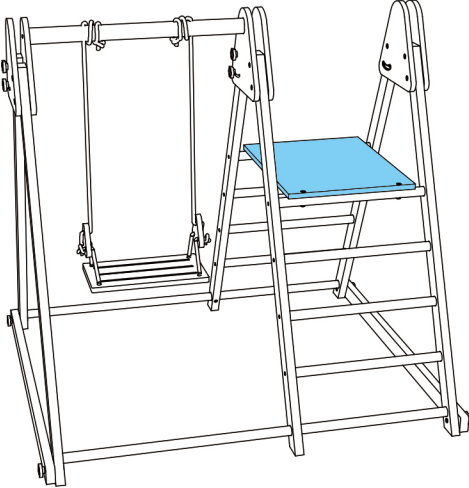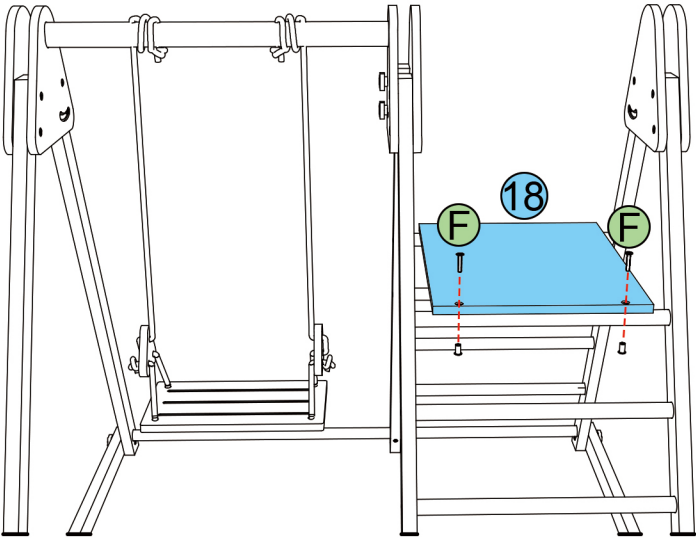



<b>(F)</b>	 M6x30 M6x20	2
<b>(G)</b>	 4mm	2

07-1

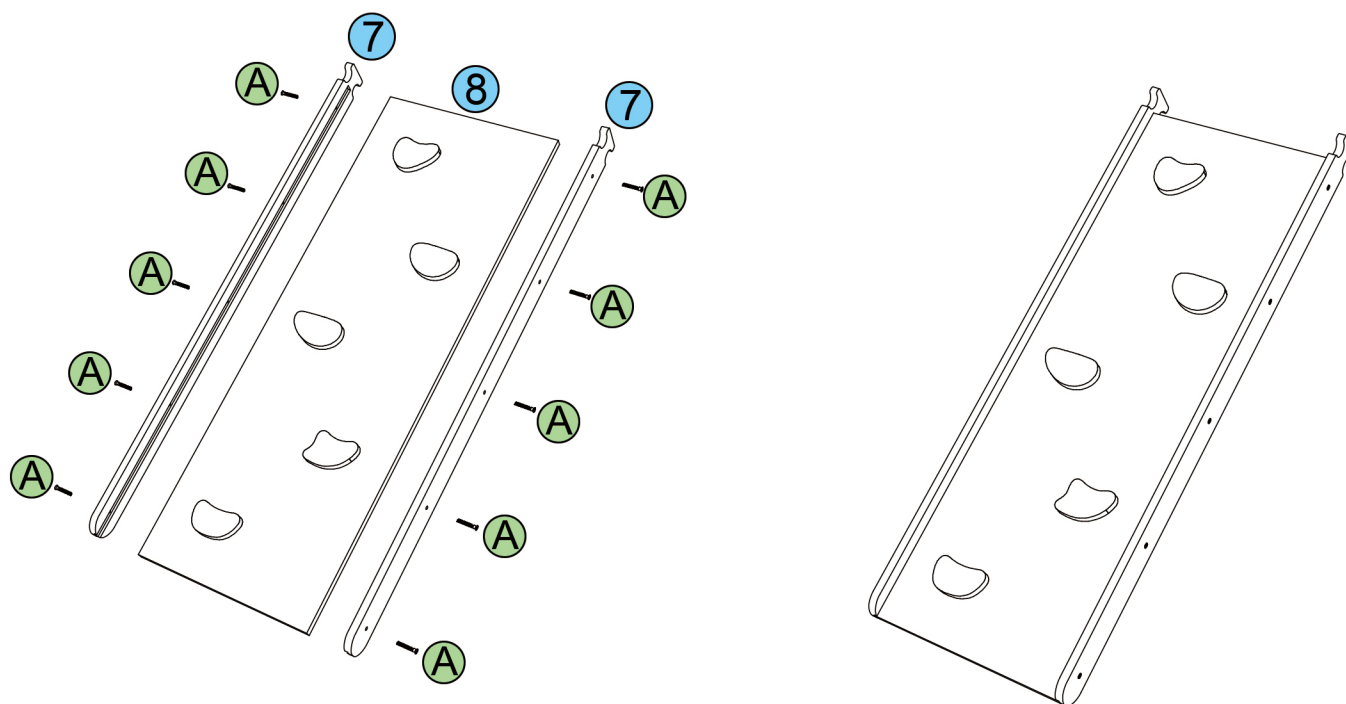

07-2

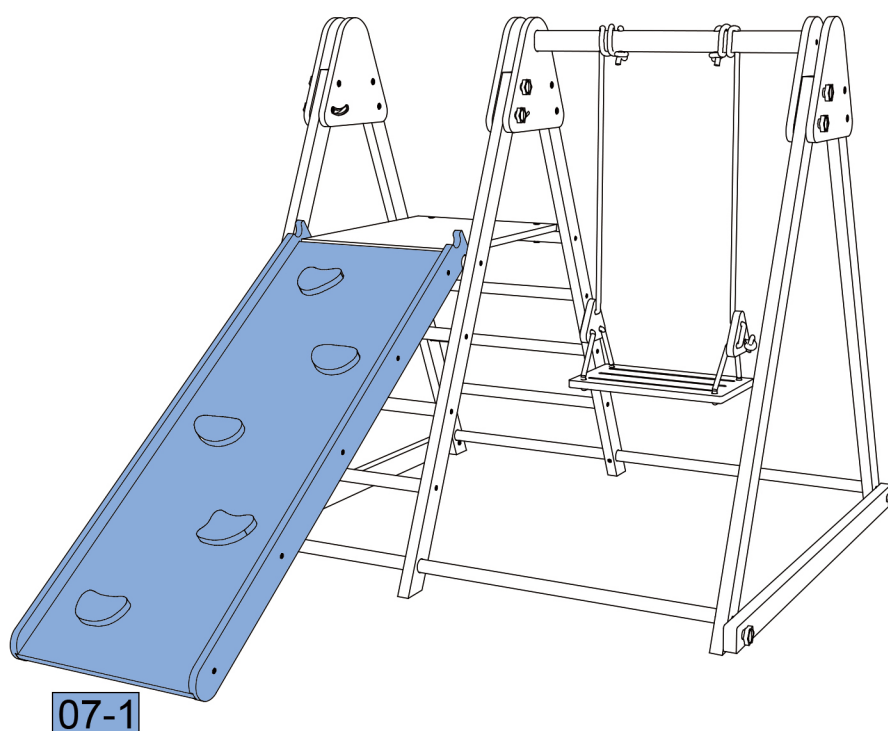

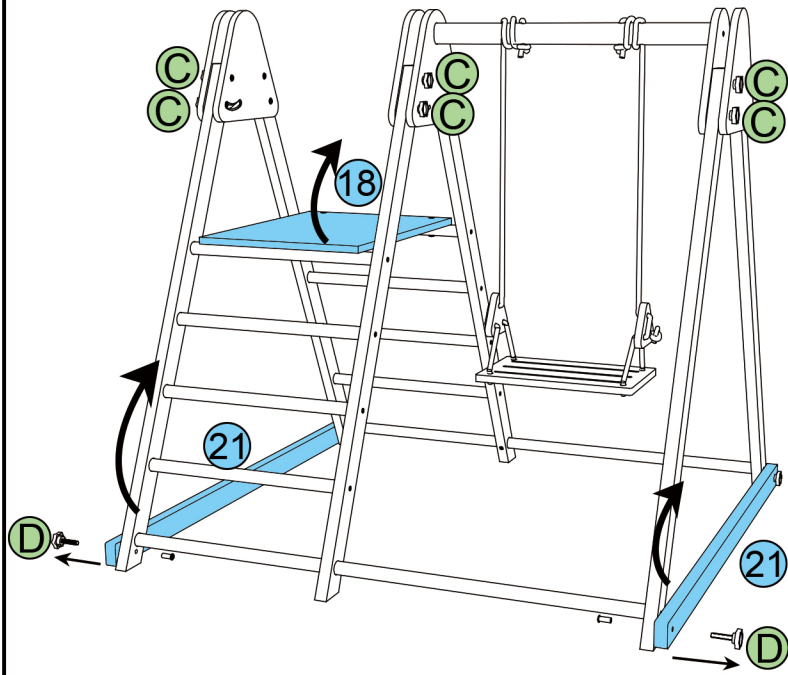


Note: 1. Remove ramp/slide

2. Remove two (D) screws by hand from the slide side only and loosen the other two



3. Loosen all (C) screws

4. Fold up the two beams (21) and the platform (18) to fold the set

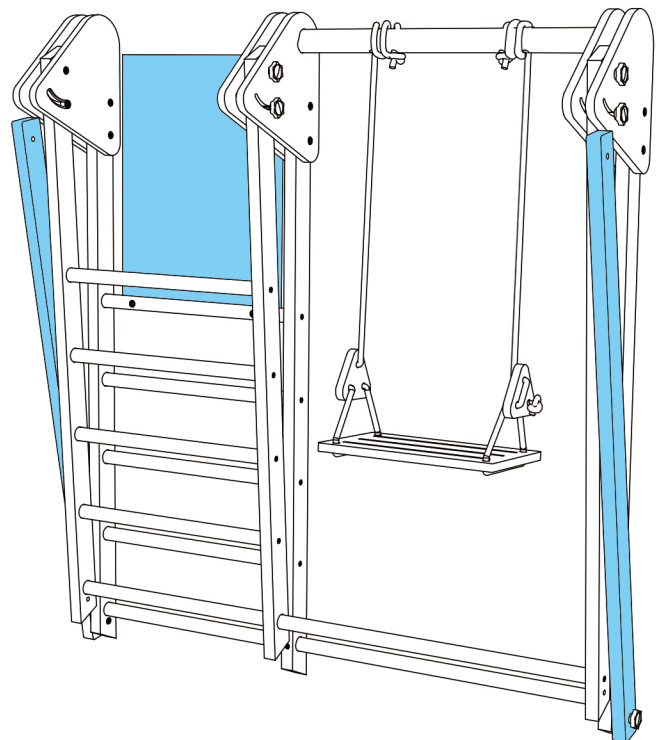





Note: Check all connections and bolts for tightness at least twice monthly during use.  
Do not use if screws are loose.

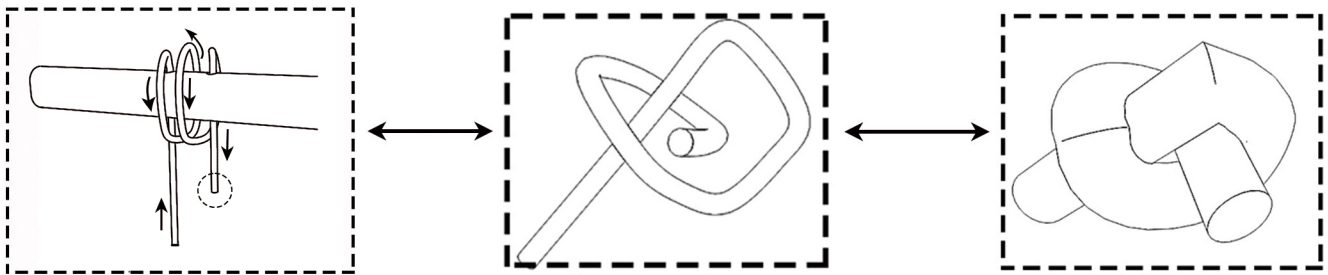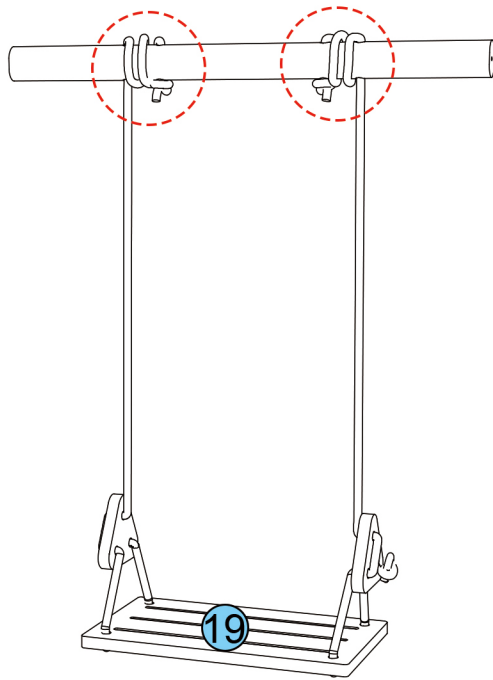

Note: Take off part 19 wooden swing and replace it with part 20 cloth swing. Copy the rope tying procedure as shown. Go up through the inside hole, wrap the rope around the bar 3 times, then down through the outside hole and tie a single knot. Make sure the seat is level.

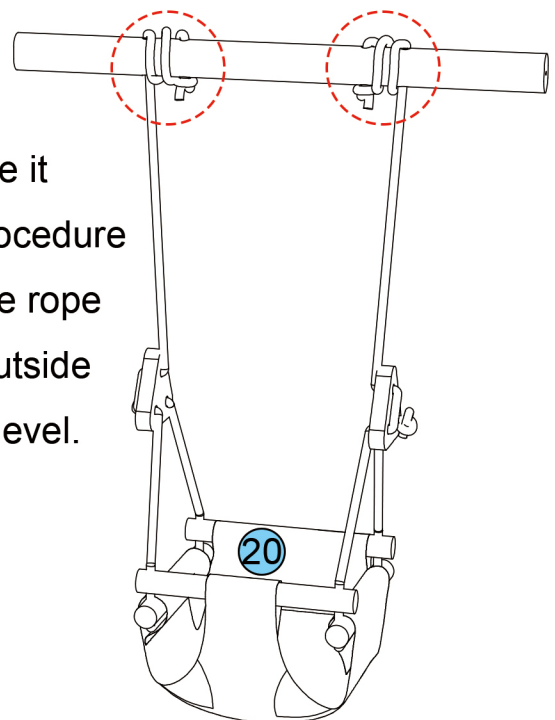

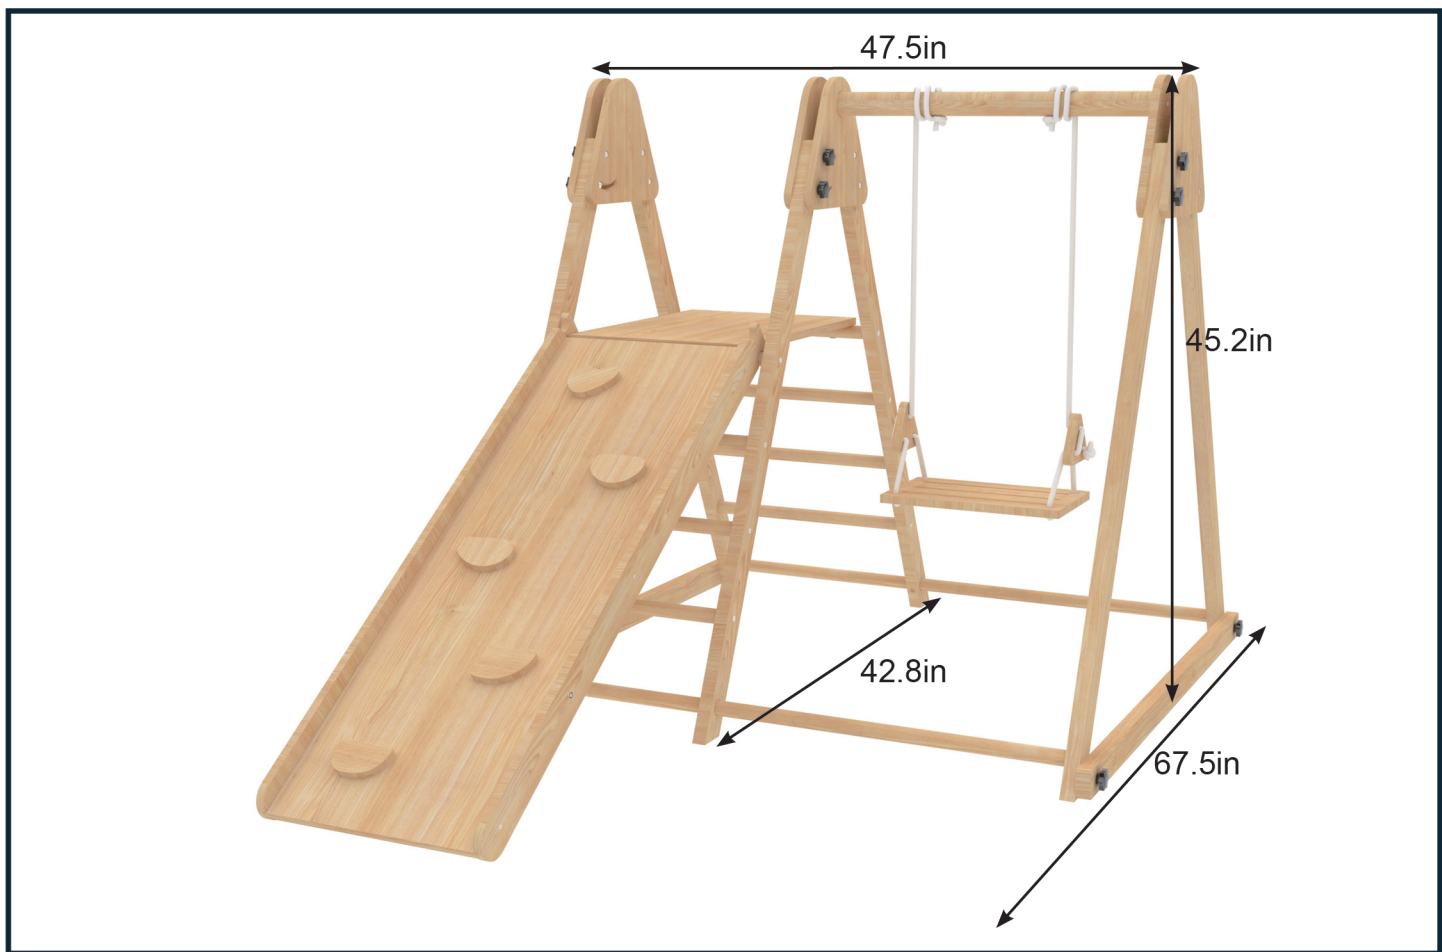

For questions with assembly or replacement parts, please email us at: [info@avenlur.com](mailto:info@avenlur.com) or call us at: **888-697-3931**